


220V-240V AC



Approval Marks

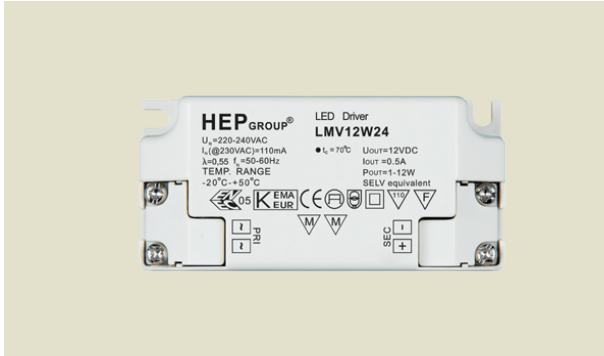

Certified

EN 61047:1992+A1:1996  
 EN 61347-1:2001  
 EN 61347-2-2:2001

Electronic

Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage Range		198	230	264	Vac
Input Frequency		47	50-60	63	Hz
Output Power(Pout)	Regular LED	1	-	12	W
Input Current(Iin)	25°C,Nominal Input@230VAC	-	110	-	mA
Output Voltage(Vout)		23.76	24	24.24	Vdc
Output Current(Iout)	25°C,Nominal Input	40	-	500	mA
Power Factor	Full Load	-	0.55	-	
Protection	Overload protection				
	Short Circuit Protection				
	Over Heat Protection				
Ambient Temp.		-20	-	+50	°C
Case Temp. (Tc)	Normal Conditions	-	-	+70	°C


Lamp Type Regular LED 0.04~0.1W

Application Space

Indoor Use  
 (Low Humidity, No Condensation)

Physical

Parameter

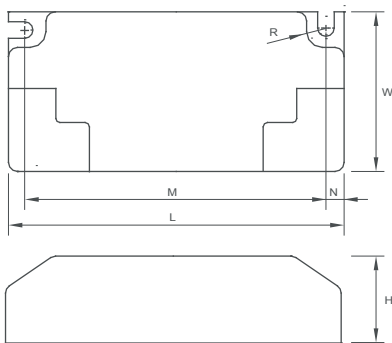

L : 85 mm    H : 22 mm  
 M : 76.2 mm    K : mm  
 N : 4.6 mm    R : 2.1 mm  
 W : 40.4 mm    Slot On One Side Allowing Alignment : M+/-3 mm

Tolerance :  $\geq 0 \sim 100 \geq \pm 0.5\text{mm}$   
 $100 \geq \pm 1\text{ mm}$

Terminal Block : Screw Terminal  
 Housing Material : Polycarbonate  
 Soldering : Lead-Free, Comply With RoHS  
 Label : Surface Print

Wiring Diagram

