


**piconet® Stand-alone Module for DeviceNet™**  
**8 Digital Outputs 2 A ( $\Sigma$  4A)**  
**SDNB-0008D-0002S**

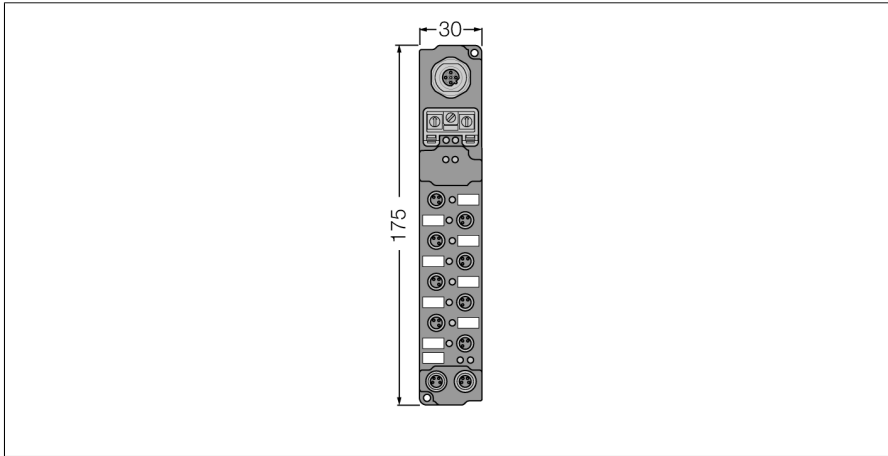

<b>Type designation</b>	SDNB-0008D-0002S
Ident-No.	6824082
<b>Operating / load voltage</b>	20...29 VDC
<b>Fieldbus transmission rate</b>	125/250/500 kbps
Fieldbus addressing	0 to 99
Service interface	parameterisation via I/O-ASSISTANT
Electrical isolation	Fieldbus to operational voltage
<b>Number of channels</b>	8 digital outputs acc. to EN 61131-2
Output voltage	20...29 VDC from load voltage
Output current per channel	2
Load type	resistive, inductive, lamp load
Switching frequency	≤ 500 Hz
Simultaneity factor	0.25
<b>Operating temperature</b>	0...+55 °C
Storage temperature	-25 to 85 °C
Vibration test	as per EN 60068-2-6
Shock test	acc. to DIN EN 60068-2-27
Electromagnetic compatibility	according to EN 61000-6-2/EN 61000-6-4
Protection class	IP67
Approvals	CE, cULus

**piconet® Stand-alone Module for DeviceNet™**  
**8 Digital Outputs 2 A ( $\Sigma$  4A)**  
**SDNB-0008D-0002S**

Data in process image

		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
<b>Output</b>	<b>Byte 0 (M8)</b>	C7P4	C6P4	C5P4	C4P4	C3P4	C2P4	C1P4	C0P4
	<b>Byte 0 (M12)</b>	C3P2	C3P4	C2P2	C2P4	C1P2	C1P4	C0P2	C0P4

C... = Connector No., P... = Pin No.